

Pressor[®] High Pressure Screw Press

**Designed for higher throughput
and lower fat residuals from a
variety of rendered materials.**

**Long service life and low
maintenance costs.**



- Choose from a wide range of sizes and configurations to meet every rendering application—from the largest, with a 13” shaft for increased throughput and improved feed capability on soft, difficult-to-press materials, to a compact and efficient 7” model ideal for smaller plants.
- Pressors are available with horsepower ratings between 60 to 300 HP and a choice of shaft configurations.
- All Pressor models offer proven reliability, rugged construction and feature a single motor to drive all mechanical parts.
- Available with the new Dupps Hybrid HCPR (High Compression Press Release) shaft for up to 25% lower residuals in most rendered products.



Pressor[®] High Pressure Screw Press

Designed for higher throughput
and lower fat residuals from a
variety of rendered materials.

Long service life and low
maintenance costs.



Shown
without covers.

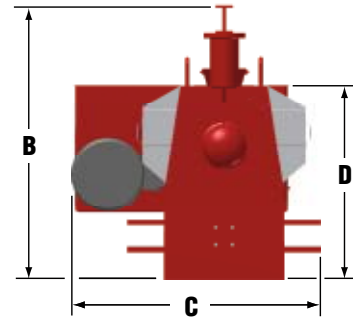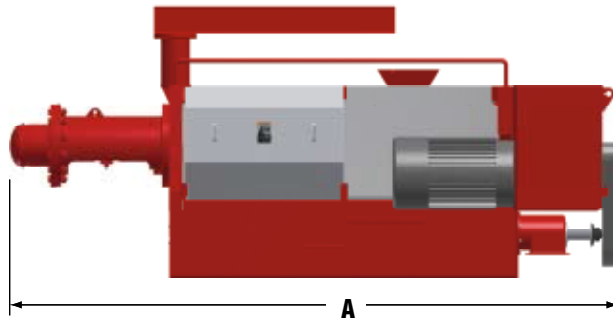

| Model | A | B | C | D | Dry Weight | Motor | Approx. Capacity* |
|----------------|------------------------|---------------------|---------------------|---------------------|--------------------------|------------------------------|--|
| 13-13-6 | 5,575 mm 18' 3 1/2" | 3,048 mm 120" | 2,108 mm 77 1/2" | 1,803 mm 71" | 19,045 kg 41,900 lbs. | 224 kw 300 HP | 4,050 kg/hr 9,000 lbs./hr |
| 12-12-4 | 4,709 mm 15' 5 3/8" | 2,337 mm 92" | 1,626 mm 64" | 1,499 mm 59" | 10,340 kg 22,750 lbs. | 150 kw 200 HP | 3,375 - 3,600 kg/hr 7,500 - 8,000 lbs./hr |
| 12-10-6 | 5,318 mm 17' 5 3/8" | 2,337 mm 92" | 1,626 mm 64" | 1,499 mm 59" | 10,370 kg 22,815 lbs. | 150 kw 200 HP | 3,150 kg/hr 7,000 lbs./hr |
| 12-10-4 | 4,658 mm 15' 3 3/8" | 2,337 mm 92" | 1,626 mm 64" | 1,499 mm 59" | 8,950 kg 19,700 lbs. | 112 - 150 kw 150 - 200 HP | 2,475 - 2,925 kg/hr 5,500 - 6,500 lbs./hr |
| 9-7-3 | 3,048 mm 10'-0" | 1,765 mm 69 1/2" | 1,397 mm 55" | 1,283 mm 50 1/2" | 4,230 kg 9,300 lbs. | 45 - 56 kw 60 - 75 HP | 1,125 - 1,350 kg/hr 2,500 - 3,000 lbs./hr |

*Cake discharge.

Due to ongoing product improvements,
data shown here is subject to change without notice.

The Dupps Company



Germantown, Ohio U.S.A.
Phone: 937/855-6555
Fax: 937/855-6554
E-mail: info@dupps.com

Visit www.dupps.com to explore the
world's leading protein recycling systems,
equipment and service.

© 2016 The Dupps Company Printed in U.S.A.