Ring Dryer Flash Dryer System

Grinds, conveys and finish dries in one energy-efficient system.

Recirculates 50% of the heated exhaust air to save fuel and odor control costs.

- The Dupps RIng Dryer Handles any product that can be air entrained—but won't stick to the duct work.
- Because it exposes the material to heat for only a few seconds, the Ring Dryer gives you a cooler product, ready to bag or store, with accurate moisture content and no wet spots.
- Simple and accurate control of moisture content.
- Short exposure to heat retains product digestibility and lysine bioavailability. Finished Product has a light, uniform color.
- Available in an airless configuration for reduced risk of in-system fires, less exhaust and minimal odor control equipment.






Ring Dryer

Flash Dryer System

Grinds, conveys and finish dries in one energy-efficient system.

Recirculates 50% of the heated exhaust air to save fuel and odor control costs.



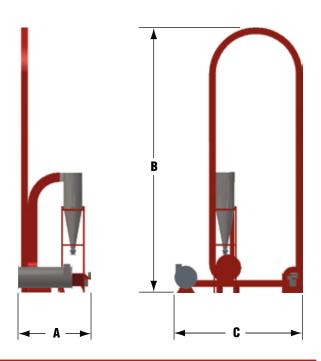

Model	A	В	C	Water/hr. Evaporative Capacity*
1200B	3,226 mm	8.992 mm	6,223 mm	431 kg
	10′ 7″	29′ 6″	20′ 5″	950 lbs.
1600B	3,658 mm	10,414 mm	7,087 mm	726 kg
	12′ 0″	34′ 2″	23′ 3″	1,600 lbs.
2000B	4,445 mm	11,659 mm	7,925 mm	1,134 kg
	14′7″	38′3″	26′ 0″	2,500 lbs.
2400B	4,953 mm	12,497 mm	7,671 mm	1,633 kg
	16′ 3″	41′0″	25′ 2″	3,600 lbs.

^{*} Capacity based on 50% moisture in feed, 10% moisture in product.

The Dupps Company



 $Germantown, \ Ohio \ U.S.A.$

Phone: 937/855-6555 Fax: 937/855-6554

E-mail: info@dupps.com

Visit **www.dupps.com** to explore the world's leading protein recycling systems, equipment and service.

© 2013 The Dupps Company Printed in U.S.A.